

Top loading scale

Top loading scale which can be used in legal metrology



BAT INT



AC/DC



IP65




VERIF

FEATURES:


- ABS housing.
 - Stainless steel pan 200x260mm.
 - Protective membrane between frame shell and stainless steel pan.
 - IP65 Protection.
 - Backlight LCD display.
 - 5 digits measuring 25 mm.
 - Secondary indication in the rear part of the scale with 15mm digits.
 - Bubble level.
 - Units: kg and lb.
 - Adjustable feet to raise by up to 10 mm.
 - Operating temperature: 0°C a +40°C.
 - Internal rechargeable battery 6V/3,2Ah, with up to 70 hours of continuous use (without backlight).
 - Power supply with adaptor AC/DC 230-240Vac 50Hz.
 - Programmable auto switch off (3, 5 and 15 minutes).
- Approval up to to 3.000 divisions.

FUNCTIONS:

- Zero
- Tare or multi tare (for non standardised versions)
- Gross/Net
- Allows for operations in kilos and grams

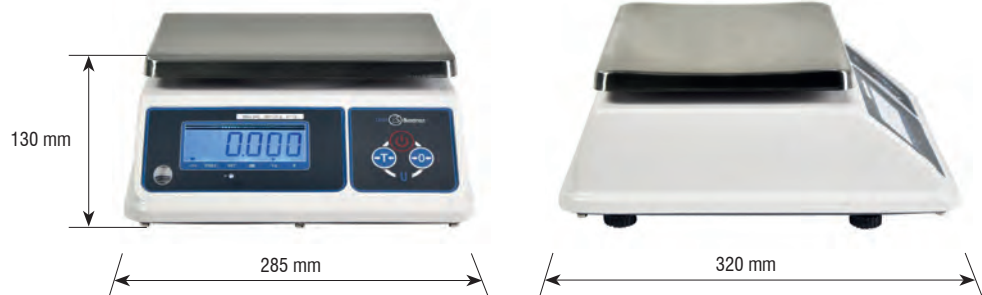

Power input protection



Silicone protection



Adjustable feet



Back display

Code #	Capacity (kg)	Readout Standard (g)	Readout CE-M (g)	Pan dimensions (mm)	Packing dimensions (mm)	Packing weight (kg)	Certifications	
							ENAC	
							Code #	
260288	3	0,5	-	200x260	390x340x210	4,8	900033	
260292	6	1	-	200x260	390x340x210	4,8	900001	
260425	15	2	-	200x260	390x340x210	4,8	900001	
260426	30	5	-	200x260	390x340x210	4,8	900001	
260291 M	3	-	1	200x260	390x340x210	4,8	900033	
260293 M	6	-	2	200x260	390x340x210	4,8	900001	
260287 M	15	-	5	200x260	390x340x210	4,8	900001	
260290 M	30	-	10	200x260	390x340x210	4,8	900001	

*The price for the reference with the icon green M includes the verifications